




Welding Bench for Extraction

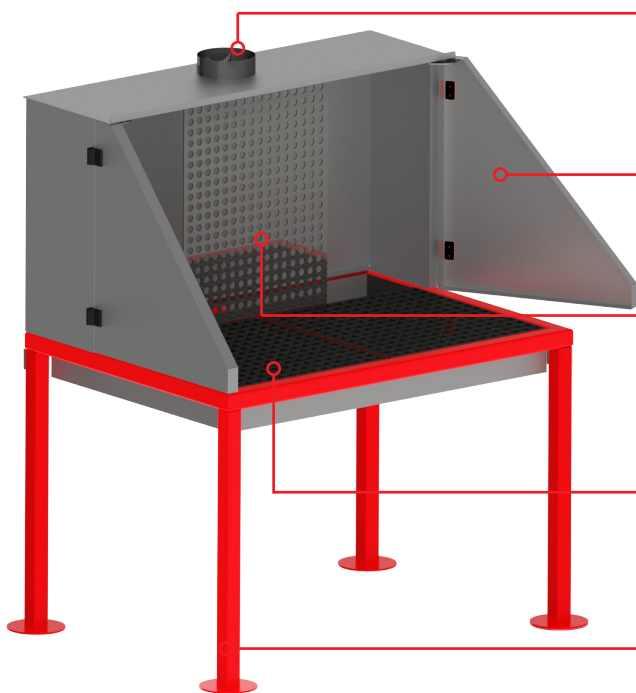

CONNECTION FOR CENTRAL EXTRACTION

Duct connection outlet is designed in the right diameter for central dust extraction system

EXPANDABLE WORKING AREA

Openable side panels allow you to expand working area. 3 Position is available

INTEGRATED SPARK SHIELD

Integrated spark shield protect main dust collector from sparks which could be arise during grinding operation

GRID PANELS FOR EASY MAINTENANCE

Grid base panels can be remove easily with hand and allow you to clean hooper easily.

HIGH QUALITY STEEL STRUCTURE


High quality and durable steel structure is designed and manufactured to operated in the most harsh environments.

GENERAL INFORMATION

Type	Bench for Fume Extraction
Application	Fume (Welding etc.)

TECHNICAL INFORMATION

Rec. Air Flow	min. 2.200 m ³ /h
Outlet Diameter	200 mm
Dimension (W x L x H)	1.200 x 885 x 1.550 mm
Bench Height	870 mm

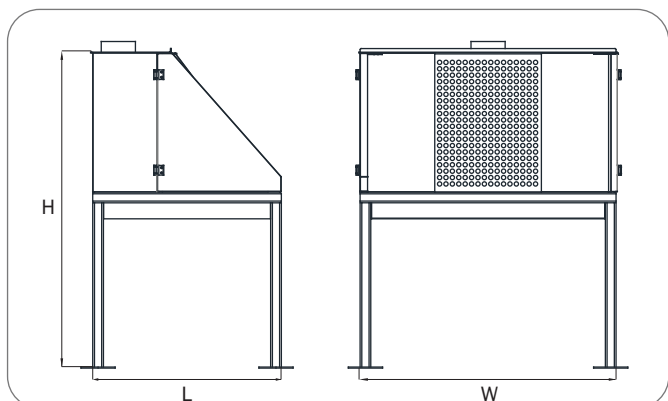

ORDER NO

Welding Bench for Extraction	BKM

PRESSURE LOSS

