
Downdraft Bench with Fan & Filter

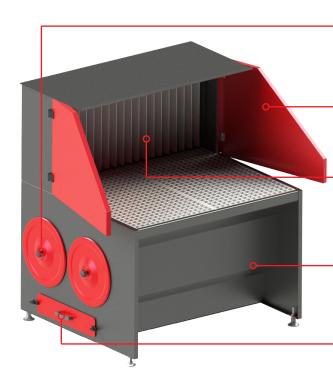

CLEANABLE CARTRIDGE FILTERS

Top quality and cleanable cartridge filters allow you long filter lifetime and lower cost of ownership

EXPANDABLE WORKING AREA

Openable side panels allow you to expand working area. 3 Position is available

INTEGRATED SPARK SHIELD

Integrated spark shield protect main dust collector from sparks which could be arise during grinding operation

INTEGRATED RADIAL FAN

High efficient and silent radial fan provides high extraction efficiency

TRAY FOR WASTE DUST

Tray for easy discharge of waste dust

GENERAL INFORMATION		
Cartridge		
nanoBLEND FR		
polyMIGHT PTFE 65		
2		
40 m²		
20 m²		
F9 Class		
H13/H14 Class		

TECHNICAL INFORMATION		
Extraction Capacity	2.500 m ³ /h	
Dimensions (W x L x H)	1.300 x 1.100 x 1.450 mm	
Motor Power	1,1 kW - 1.450 rpm	
Power Supply	3 x 380 V / 50 Hz	
Noise Level	75 dB(a)	

ORDER NO	
Downdraft Bench with nanoBLEND FR filter	BTKMC-NB
Downdraft Bench with polyMIGHT PTFE 65 filter	BTKMC-PTFE

SPARE PART ORDER NO	
nanoBLEND FR Filter	D324/660/B135FR
polyMIGHT PTFE 65 Filter	D324/660/265PTFE

