


Grinding Bench for Extraction

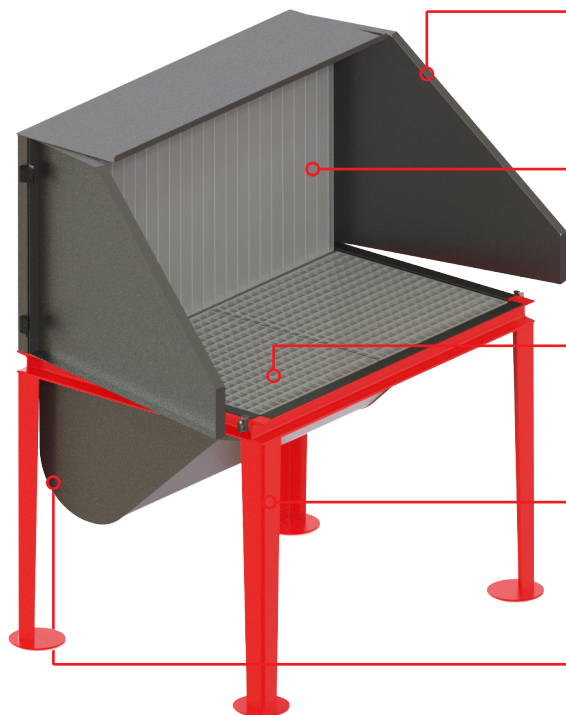

EXPANDABLE WORKING AREA

Openable side panels allow you to expand working area. 3 Position is available

INTEGRATED SPARK SHIELD

Integrated spark shield protect main dust collector from sparks which could be arise during grinding operation

GRID PANELS FOR EASY MAINTENANCE

Grid base panels can be remove easily with hand and allow you to clean hooper easily.

HIGH QUALITY STEEL STRUCTURE

High quality and durable steel structure is designed and manufactured to operated in the most harsh environments.

CONNECTION FOR CENTRAL EXTRACTION

Duct connection outlet is designed in the right diameter for central dust extraction system

GENERAL INFORMATION


Type	Bench for Dust Extraction
Application	Dust (Grinding etc.)

TECHNICAL INFORMATION

Rec. Air Flow	min. 2.200 m ³ /h
Outlet Diameter	200 mm
Dimension (W x L x H)	1.200 x 885 x 1.525 mm
Bench Height	870 mm

ORDER NO

Grinding Bench for Extraction	BTM

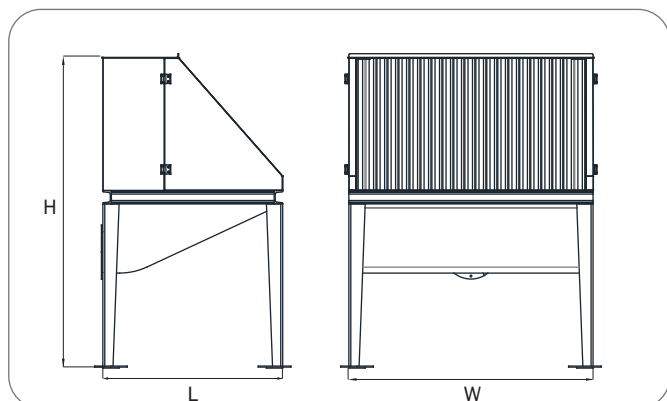

PRESSURE LOSS

